

ACOUSTI-SEAL® 900 SERIES TECHNICAL DATA

The Acousti-Seal Pocket Door.

Acousti-Seal Pocket Doors are either acoustic or non-acoustic solutions to conceal panel storage areas.

Pocket Doors are prefabricated with jambs and hadward installed. Pocket Doors are pre-finished with all available finish options or uncovered for field finishing.

Modernfold Model

Acousti-Seal Pocket Door

This specification along with product information and model details can be downloaded from www.modernfold.com

SPECIFICATION - SECTION 10650 OPERABLE PARTITIONS

PART 1 - GENERAL

See Operable Partition Specification for details.

PART 2 – PRODUCTS

See Operable Partition Specification for details.

2.7 OPTIONS

C/D. Available Accessories/Options:

1. Pocket Doors: Acousti-Seal Pocket Doors by Modernfold, Inc., with same construction, finish, and appearance as the adjacent panels.
2. Pocket Door configuration shall be manually operated (select one):
 - a. Type I single door hinged to a jamb on one side as required.
 - b. Type II double door hinged to a jamb on each side and closing in the center.
 - c. Type III double doors hinged to a jamb on each side and closing in the center. One of the door panels is equipped with a smaller hinged panel that folds back when the operable partition is extended into the pocket.
 - d. Type IV bi-fold door hinged to a jamb on one side as required.
3. Panels shall be nominal 3-inch (76mm) thick in manufacturer's standard width. All panel horizontal and vertical framing members fabricated from minimum 18-gauge formed steel with overlapped and welded corners for rigidity. Frame is designed so that full vertical edges of panels are of formed steel and provide concealed protection of the edges of panel skin.
4. Panel skin shall be (select one):
 - a. 0.50-inch (13mm) tackable fire core C gypsum board, class "A" rated single material or composite layers continuously bonded to panel frame.
 - b. 0.50-inch (13mm) tackable moisture resistant gypsum board, class "A" rated single material or composite layers continuously bonded to panel frame.

- c. 0.50-inch (13mm) medium density fiberboard, single material or composite layers continuously bonded to panel frame.
- d. Nominal 21-gauge roll-formed steel wrapping around panel edge. Panel skins shall be lock formed and welded directly to the frame for unitized construction.

5. Panels hinges shall be (select one):
 - a. Full leaf butt hinges, attached directly to panel frame with welded hinge anchor plates within panel to further support hinge mounting to frame. Hinges mounted into panel edge or vertical astragal are not acceptable.
 - b. SOSS® ?invisible laminated hinge with antifriction segments mounted between each heat-treated link. Hinge to be attached directly to panel frame. Welded internal hinge bracket shall support the hinge and allow for adjustment of hinge plates. Concealed hinges or hinges mounted into panel edge or vertical astragal are not acceptable.
6. Panel Trim: No vertical trim required or allowed on edges of panels; minimal groove appearance at panel joints.
7. Pocket Door hanging weight shall not exceed 9 lbs./square foot
8. Panel Finishes: Factory applied, class "A" rated material. Finish shall be (select as appropriate):
 - a. Reinforced vinyl with woven backing weighing not less than 15 ounces per lineal yard.
 - b. Reinforced heavy duty vinyl with woven backing weighing not less than 27 ounces per lineal yard.
 - c. Acoustical, non-woven needle punch carpet, with fused fibers to prevent unraveling or fray of material.
 - d. Wall covering and upholstery fabric weighing not less than 12 ounces per lineal yard, with surface treatment to resist stains.
 - e. Customer's own material (subject to factory approval).
 - f. Full height tackboard with vinyl or fabric covering.
 - i. 0.25-inch natural cork

ACOUSTI-SEAL® 900 SERIES TECHNICAL DATA


- ii. 0.25-inch fiber board tackbase
- g. Full height steel work surface (chalkboard or dry marker board).
- h. High pressure plastic laminate on MDF board.
- i. Wood veneer on MDF board.
- j. Reconstituted wood veneer (FormWood) on steel skin.
- k. Uncovered for field finishing.
- l. Primed for field finishing.

- 9. Pocket Door jambs shall be continuous channels anchored to a fixed wall. Welded hinge anchor plates shall support pocket door hinges and permit a full 180-degree swing.
- 10. Pocket Door framing and acoustical baffles as required shall be by others.


PART 3 – EXECUTION

See Operable Partition Specification for details.


ACOUSTICALLY RATED

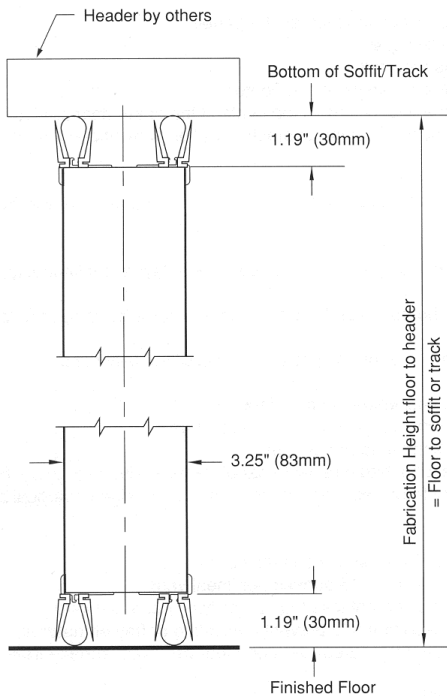

NON-ACOUSTICALLY RATED

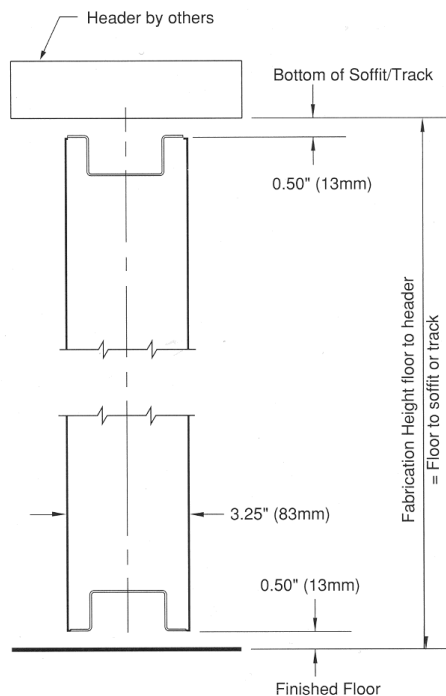


JAMB & CLOSURE

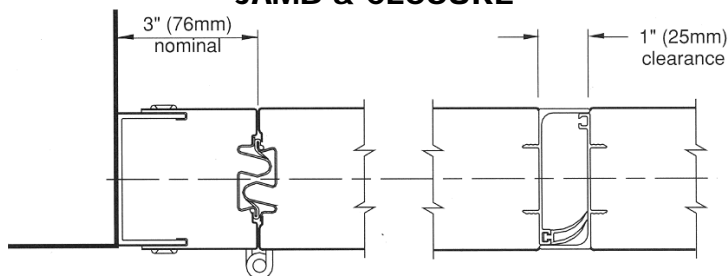


ACOUSTI-SEAL® 900 SERIES TECHNICAL DATA


Type I

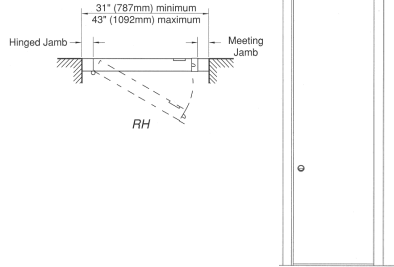


Type III

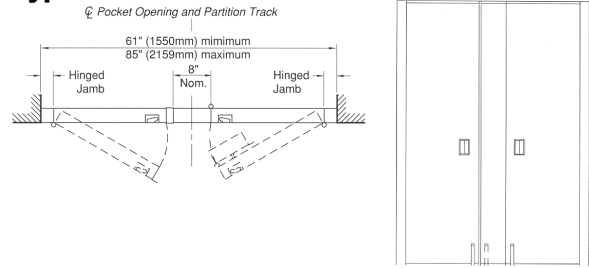


Type II

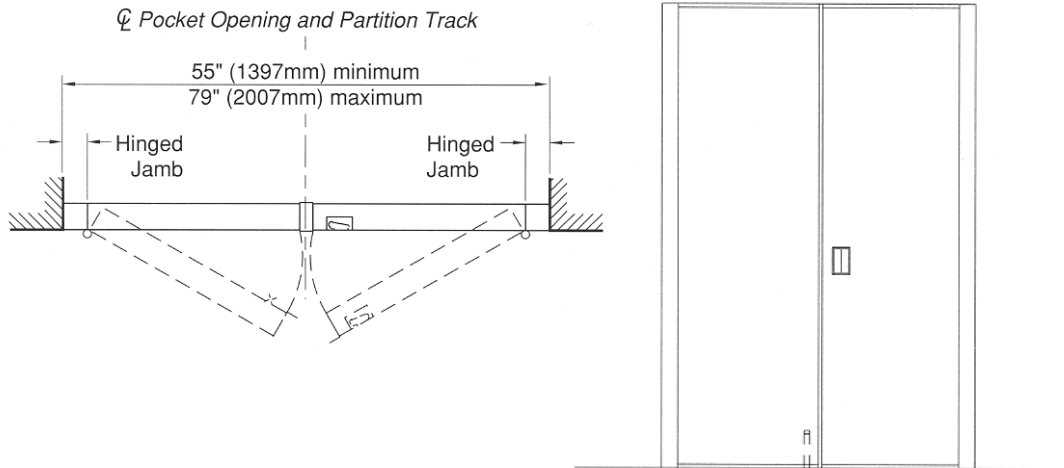

Type IV A

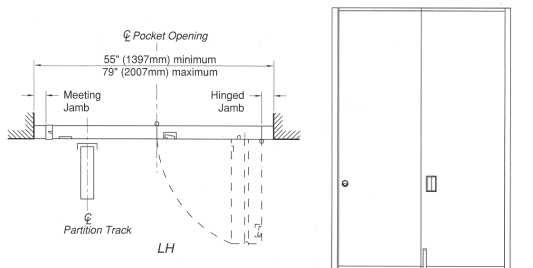

Type IV B

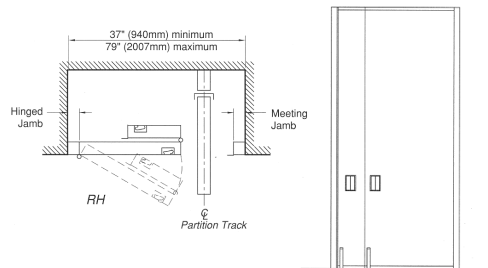

Modernfold, Inc.

Toll Free: 800.869.9685
www.modernfold.com
email: info@modernfold.com

A DORMA Group Company
www.dorma-usa.com